

LDSC...H110 90° Horizontal Bend

Overview:

Application

Diversion in cable routing

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:


F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

**Fittings of any internal radius available upon request.
For joining fittings to cable ladder lengths use Straight
Connector LSSU...**

and sets of Screw SGK8×16

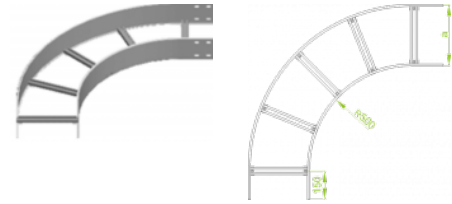

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LDSC200H110	200	412522	2	6,19
LDSC300H110	300	412532	2	6,99
LDSC400H110	400	412542	1	8,04
LDSC500H110	500	412552	1	8,78
LDSC600H110	600	412562	1	10,23