

## LDST...H110 90° Horizontal Bend

### Overview:

**Application**

Diversion in cable routing

**Material**

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)


**Available to order:**

**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E-** stainless steel (SS)

**L-** powder coating in a full range of colours (PC)

**Fittings of any internal radius available upon request.  
For joining fittings to cable ladder lengths use Straight  
Connector LSSU...  
and sets of Screw SGK8×16**

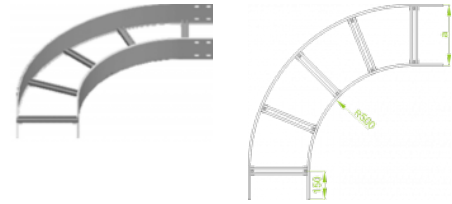

### Versions:

Sheet thickness: **3,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LDST200H110	200	412523	2	8,81
LDST300H110	300	412533	2	9,77
LDST400H110	400	412543	1	11,12
LDST500H110	500	412553	1	11,98
LDST600H110	600	412563	1	13,91