

TDST...H110 Horizontal Tee


Overview:

Application
Branching out cable runs

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS)
L- powder coating in a full range of colours (PC)

Fittings of any internal radius available upon request.
For joining fittings to cable ladder lengths use Straight Connector LSSU... and sets of Screw SGKM8×16
In case of special orders please specify dimensions a and b.

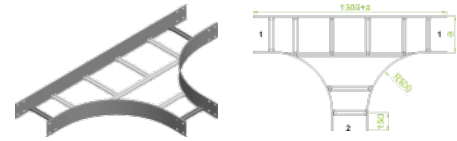

Versions:

Sheet thickness: **3,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
TDST200H110	200	412623	1	12,89
TDST300H110	300	412633	1	14,16
TDST400H110	400	412643	1	15,19
TDST500H110	500	412653	1	16,79
TDST600H110	600	412663	1	17,96