

LLDSC...H110 Adjustable Vertical Bend

Overview:

Application

Diversion in cable routing. Full-range angle adjustment with a lock

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

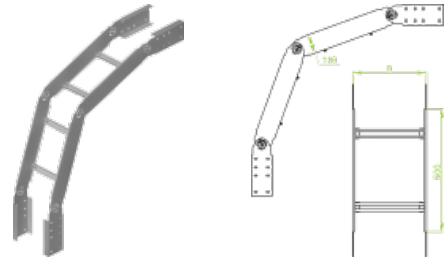

Versions:

Sheet thickness: **2,0 mm**

| Symbol | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|---------------------|--------------|------------------|-----------------|--------------|
| LLDSC200H110 | 200 | 413722 | 10 | 9,15 |
| LLDSC300H110 | 300 | 413732 | 4 | 9,56 |
| LLDSC400H110 | 400 | 413742 | 4 | 10,01 |
| LLDSC500H110 | 500 | 413752 | 4 | 10,45 |
| LLDSC600H110 | 600 | 413762 | 4 | 10,86 |