

## LLDSC...H110 Adjustable Vertical Bend

### Overview:

#### Application

Diversion in cable routing. Full-range angle adjustment with a lock

#### Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

#### Available to order:

**F**- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E**- stainless steel (SS)

**L**- powder coating in a full range of colours (PC)

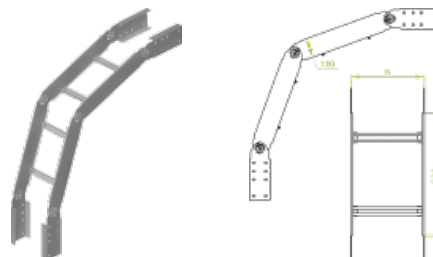

### Versions:

Sheet thickness: **2,0 mm**

| Symbol              | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|---------------------|--------------|------------------|-----------------|--------------|
| <b>LLDSC200H110</b> | <b>200</b>   | <b>413722</b>    | <b>10</b>       | <b>9,15</b>  |
| <b>LLDSC300H110</b> | <b>300</b>   | <b>413732</b>    | <b>4</b>        | <b>9,56</b>  |
| <b>LLDSC400H110</b> | <b>400</b>   | <b>413742</b>    | <b>4</b>        | <b>10,01</b> |
| <b>LLDSC500H110</b> | <b>500</b>   | <b>413752</b>    | <b>4</b>        | <b>10,45</b> |
| <b>LLDSC600H110</b> | <b>600</b>   | <b>413762</b>    | <b>4</b>        | <b>10,86</b> |