

## ELDST...H110 Adjustable Vertical Bend Element

### Overview:

#### Application

Diversion in cable routing. Full-range angle adjustment with a lock

#### Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

#### Available to order:

**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E-** stainless steel (SS)

**L-** powder coating in a full range of colours (PC)

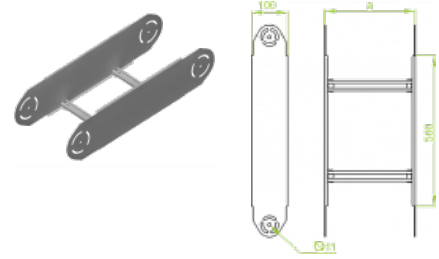

**Capability of creating vertical bends of any internal radius through joining articulated connectors. For the installation of segments of adjustable vertical bend element use Screw Sets M10x20**

### Versions:

Sheet thickness: **3,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
ELDST200H110	200	413823	10	4,46
ELDST300H110	300	413833	4	4,69
ELDST400H110	400	413843	4	4,94
ELDST500H110	500	413853	4	5,17
ELDST600H110	600	413863	4	5,41