

LDSC...H120 90° Horizontal Bend

Overview:

Application

Diversion in cable routing

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)


Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

**Fittings of any internal radius available upon request.
For joining fittings to cable ladder lengths use Straight
Connector LSSU...
and sets of Screw SGK8×16**

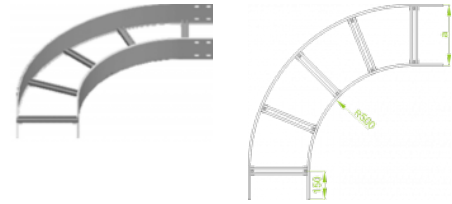

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LDSC200H120	200	430922	2	6,99
LDSC300H120	300	430932	2	7,40
LDSC400H120	400	430942	1	8,53
LDSC500H120	500	430952	1	9,23
LDSC600H120	600	430962	1	10,72