

LDST...H120 90° Horizontal Bend

Overview:

Application

Diversion in cable routing

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)


Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

**Fittings of any internal radius available upon request.
For joining fittings to cable ladder lengths use Straight
Connector LSSU...
and sets of Screw SGK8×16**

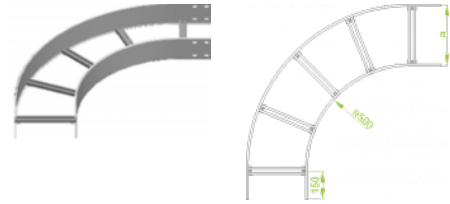

Versions:

Sheet thickness: **3,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LDST200H120	200	430923	2	10,01
LDST300H120	300	430933	2	10,40
LDST400H120	400	430943	1	11,85
LDST500H120	500	430953	1	12,65
LDST600H120	600	430963	1	14,66