

LDSMC...H120 45° Horizontal Bend

Overview:

Application

Diversion in cable routing

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)


L- powder coating in a full range of colours (PC)

Fittings of any internal radius available upon request.

For joining fittings to cable ladder lengths use Straight

Connector LSSU...

and sets of Screw SGKM8×16

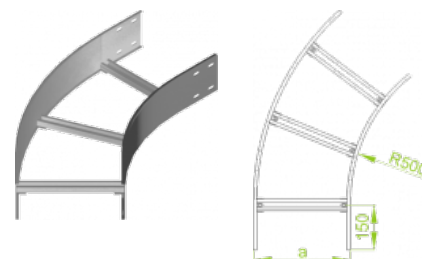

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LDSMC200H120	200	434922	2	4,60
LDSMC300H120	300	434932	2	4,87
LDSMC400H120	400	434942	2	5,60
LDSMC500H120	500	434952	2	6,06
LDSMC600H120	600	434962	2	7,04