

LWDSC...H120 90° Vertical Bend - Internal

Overview:

Application

Diversion in cable routing

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)


L- powder coating in a full range of colours (PC)

For joining fittings to cable tray use Straight Connectors for Fittings

LSSU... and Screw Sets SGKM8×16. Capability of creating vertical bends of any internal radius adjusted to minimum cable bending angle.

FEATURES & BENEFITS:

- eye-pleasing appearance
- high mechanical properties
- even distribution of cables
- optional use of covers

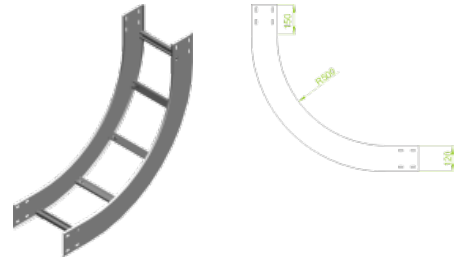

Versions:

Sheet thickness: 2,0 mm

| Symbol | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|--------------|--------------|------------------|-----------------|--------------|
| LWDSC200H120 | 200 | 431222 | 1 | 6,31 |
| LWDSC300H120 | 300 | 431232 | 1 | 6,72 |
| LWDSC400H120 | 400 | 431242 | 1 | 7,14 |
| LWDSC500H120 | 500 | 431252 | 1 | 7,56 |
| LWDSC600H120 | 600 | 431262 | 1 | 7,97 |