

LDSC...H150 90° Horizontal Bend

Overview:

Application

Diversion in cable routing

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:


F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

**Fittings of any internal radius available upon request.
For joining fittings to cable ladder lengths use Straight
Connector LSSU...**

and sets of Screw SGK8×16

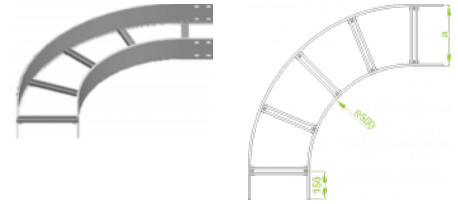

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LDSC200H150	200	432522	1	7,83
LDSC300H150	300	432532	1	8,72
LDSC400H150	400	432542	1	9,86
LDSC500H150	500	432552	1	10,64
LDSC600H150	600	432562	1	12,13