

LDSMT...H150 45° Horizontal Bend

Overview:

Application

Diversion in cable routing

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:


F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

**Fittings of any internal radius available upon request.
For joining fittings to cable ladder lengths use Straight
Connector LSSU...**

and sets of Screw SGKM8×16

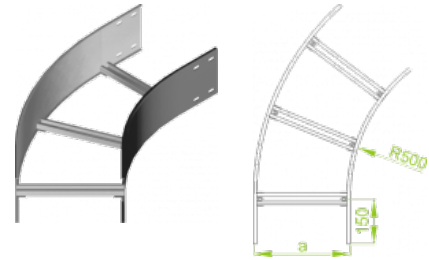

Versions:

Sheet thickness: **3,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LDSMT200H150	200	435223	2	7,45
LDSMT300H150	300	435233	2	8,18
LDSMT400H150	400	435243	2	9,16
LDSMT500H150	500	435253	2	9,77
LDSMT600H150	600	435263	2	11,09