

TDST...H150 Horizontal Tee


Overview:

- Application**
 Branching out cable runs

Material
 Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS)
L- powder coating in a full range of colours (PC)

Fittings of any internal radius available upon request.
For joining fittings to cable ladder lengths use Straight Connector LSSU... and sets of Screw SGKM8×16
In case of special orders please specify dimensions a and b.

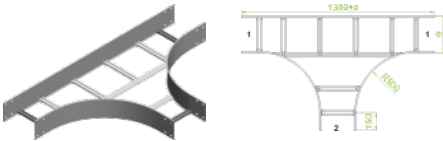

Versions:

Sheet thickness: **3,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
TDST200H150	200	432623	1	16,43
TDST300H150	300	432633	1	17,76
TDST400H150	400	432643	1	18,85
TDST500H150	500	432653	1	20,53
TDST600H150	600	432663	1	21,74