

## LLDST...H150 Adjustable Vertical Bend

### Overview:

**Application**

Diversion in cable routing. Full-range angle adjustment with a lock

**Material**


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E-** stainless steel (SS)

**L-** powder coating in a full range of colours (PC)

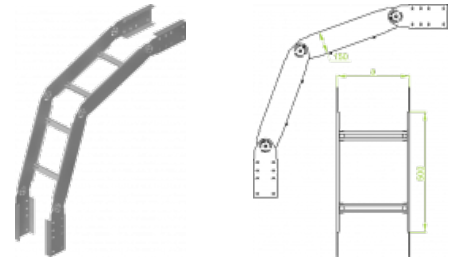

### Versions:

Sheet thickness: **3,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
<b>LLDST200H150</b>	<b>200</b>	<b>435323</b>	<b>10</b>	<b>20,25</b>
<b>LLDST300H150</b>	<b>300</b>	<b>435333</b>	<b>4</b>	<b>20,77</b>
<b>LLDST400H150</b>	<b>400</b>	<b>435343</b>	<b>4</b>	<b>21,30</b>
<b>LLDST500H150</b>	<b>500</b>	<b>435353</b>	<b>4</b>	<b>21,82</b>
<b>LLDST600H150</b>	<b>600</b>	<b>435363</b>	<b>4</b>	<b>22,34</b>