

## ELDSC...H150 Adjustable Vertical Bend Element

### Overview:

**Application**

Diversion in cable routing. Full-range angle adjustment with a lock

**Material**


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E-** stainless steel (SS)

**L-** powder coating in a full range of colours (PC)

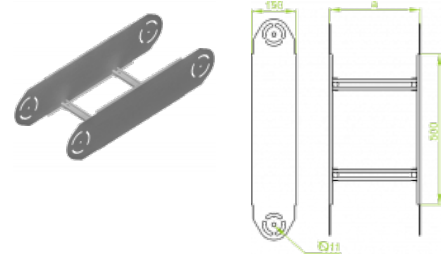

**Capability of creating vertical bends of any internal radius through joining articulated connectors. For the installation of segments of adjustable vertical bend element use Screw Sets M10x20**

### Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
ELDSC200H150	200	435422	10	4,75
ELDSC300H150	300	435432	4	4,99
ELDSC400H150	400	435442	4	5,23
ELDSC500H150	500	435452	4	5,47
ELDSC600H150	600	435462	4	5,71