

ELDST...H150 Adjustable Vertical Bend Element

Overview:

Application

Diversion in cable routing. Full-range angle adjustment with a lock

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

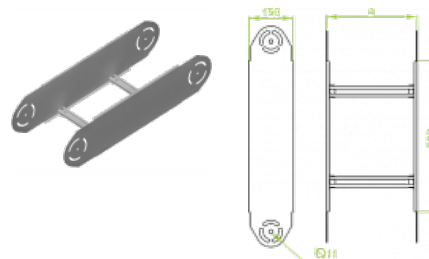

Capability of creating vertical bends of any internal radius through joining articulated connectors. For the installation of segments of adjustable vertical bend element use Screw Sets M10x20

Versions:

Sheet thickness: **3,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
ELDST200H150	200	435423	10	6,95
ELDST300H150	300	435433	4	7,21
ELDST400H150	400	435443	4	7,47
ELDST500H150	500	435453	4	7,73
ELDST600H150	600	435463	4	7,99