

LDST...H200 90° Horizontal Bend

Overview:

Application

Diversion in cable routing

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:


F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

**Fittings of any internal radius available upon request.
For joining fittings to cable ladder lengths use Straight
Connector LSSU...**

and sets of Screw SGKM8×16

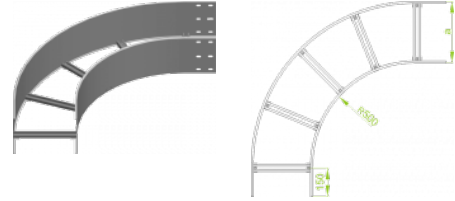

Versions:

Sheet thickness: **3,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LDST200H200	200	434123	1	14,21
LDST300H200	300	434133	1	15,50
LDST400H200	400	434143	1	17,14
LDST500H200	500	434153	1	18,24
LDST600H200	600	434163	1	20,55