

## LDST...H200 90° Horizontal Bend

### Overview:

**Application**

Diversion in cable routing

**Material**

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

**F**- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)


**E**- stainless steel (SS)

**L**- powder coating in a full range of colours (PC)

**Fittings of any internal radius available upon request.**

**For joining fittings to cable ladder lengths use Straight Connector LSSU...**

**and sets of Screw SGKM8×16**

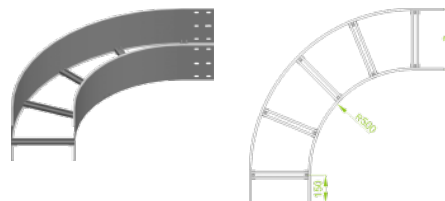

### Versions:

Sheet thickness: **3,0 mm**

| Symbol      | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|-------------|--------------|------------------|-----------------|--------------|
| LDST200H200 | 200          | 434123           | 1               | 14,21        |
| LDST300H200 | 300          | 434133           | 1               | 15,50        |
| LDST400H200 | 400          | 434143           | 1               | 17,14        |
| LDST500H200 | 500          | 434153           | 1               | 18,24        |
| LDST600H200 | 600          | 434163           | 1               | 20,55        |