

LDSMC...H200 45° Horizontal Bend

Overview:

Application

Diversion in cable routing

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)


L- powder coating in a full range of colours (PC)

Fittings of any internal radius available upon request.

For joining fittings to cable ladder lengths use Straight

Connector LSSU...

and sets of Screw SGKM8×16

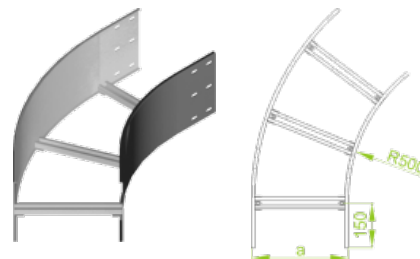

Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LDSMC200H200	200	435522	2	6,45
LDSMC300H200	300	435532	2	7,11
LDSMC400H200	400	435542	2	7,93
LDSMC500H200	500	435552	2	8,52
LDSMC600H200	600	435562	2	9,64