

LDSMT...H200 45° Horizontal Bend

Overview:

Application

Diversion in cable routing

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)


Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

**Fittings of any internal radius available upon request.
For joining fittings to cable ladder lengths use Straight
Connector LSSU...
and sets of Screw SGK8×16**

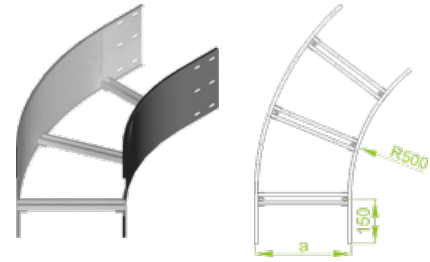

Versions:

Sheet thickness: 3,0 mm

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LDSMT200H200	200	435523	2	9,39
LDSMT300H200	300	435533	2	10,25
LDSMT400H200	400	435543	2	11,33
LDSMT500H200	500	435553	2	12,06
LDSMT600H200	600	435563	2	13,06