

LZDSC...H200 90° Vertical Bend - External

Overview:

Application

Diversion in cable routing

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)


L- powder coating in a full range of colours (PC)

For joining fittings to cable tray use Straight Connectors for Fittings

LSSU... and Screw Sets SGKM8×16. Capability of creating vertical bends of any internal radius adjusted to minimum cable bending angle.

FEATURES & BENEFITS:

- eye-pleasing appearance
- high mechanical properties
- even distribution of cables
- optional use of covers

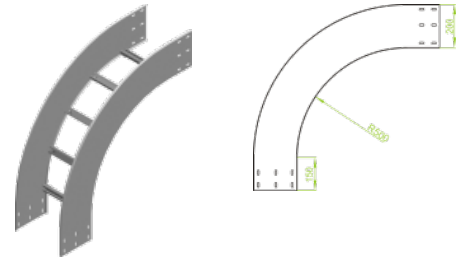

Versions:

Sheet thickness: 2,0 mm

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LZDSC200H200	200	434522	1	10,15
LZDSC300H200	300	434532	1	10,64
LZDSC400H200	400	434542	1	11,02
LZDSC500H200	500	434552	1	11,44
LZDSC600H200	600	434562	1	11,85