

LLDST...H200 Adjustable Vertical Bend

Overview:

Application

Diversion in cable routing. Full-range angle adjustment with a lock

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

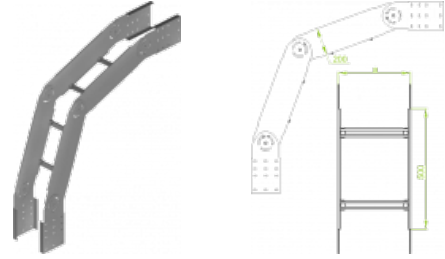

Versions:

Sheet thickness: **3,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LLDST200H200	200	435623	10	25,23
LLDST300H200	300	435633	4	25,75
LLDST400H200	400	435643	4	26,28
LLDST500H200	500	435653	4	26,80
LLDST600H200	600	435663	4	27,32