

ELDST...H200 Adjustable Vertical Bend Element

Overview:

Application

Diversion in cable routing. Full-range angle adjustment with a lock

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

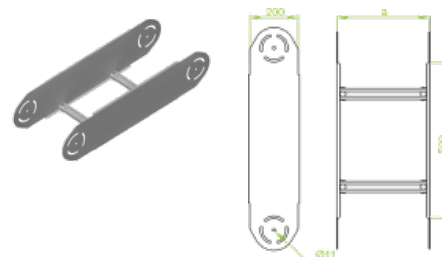

Capability of creating vertical bends of any internal radius through joining articulated connectors. For the installation of segments of adjustable vertical bend element use Screw Sets M10x20

Versions:

Sheet thickness: **3,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
ELDST200H200	200	435723	10	8,27
ELDST300H200	300	435733	4	8,53
ELDST400H200	400	435743	4	8,79
ELDST500H200	500	435753	4	9,05
ELDST600H200	600	435763	4	9,31