

BDST Ladder Side

Overview:

Application

Used in DIY install of Cable Ladders together with the rungs; at limited-access locations

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

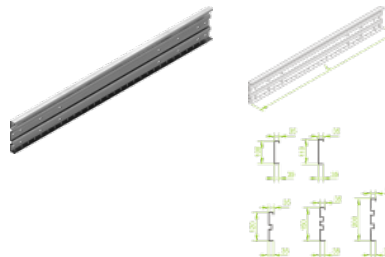

Versions:

Sheet thickness: **3,0 mm**

Symbol	Length L [m]	Catalogue number	Quantity in box	Height H [mm]	Weight [1m]
BDSTH100/3	3000	400104	2	100	3,48
BDSTH100/6	6000	400204	2	100	3,48
BDSTH110/3	3000	410204	2	110	3,93
BDSTH110/6	6000	410304	2	110	3,93
BDSTH120/3	3000	420204	2	120	4,70
BDSTH120/6	6000	420304	2	120	4,70
BDSTH150/3	3000	470204	2	150	5,90
BDSTH150/6	6000	470304	2	150	5,90
BDSTH200/3	3000	490204	2	200	7,10
BDSTH200/6	6000	490304	2	200	7,10