

SDOPE Rung

Overview:

Application

In combination with Cable Clamp UKO1 for the installation of electrical cables and wires directly on the wall in the vertical plane or horizontally, suspended from ceiling

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

For the installation use sets of SRO M6x30, SRO M6x30E, PSRO M8x75 or PSRO M8x75 E, including max. spacing of 250mm

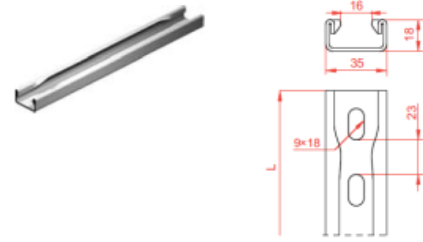

Versions:

Sheet thickness: **1,5 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Height H [mm]	Weight 1 pc.
SDOP100 E	90	35	800211	50	18	0,13
SDOP200 E	190	35	800221	50	18	0,26
SDOP300 E	290	35	800231	50	18	0,39
SDOP400 E	390	35	800241	30	18	0,52
SDOP500 E	490	35	800251	30	18	0,65
SDOP600 E	590	35	800261	20	18	0,78
SDOP800 E	790	35	800281	10	18	1,04
SDOP1000 E	990	35	800291	10	18	1,30