

UCM... Channel to beam clamp

Overview:

Application

Suspending systems of cable runs.


Material

Steel, strip galvanised to the Sendzimir method to PN-EN 10346:2011 (SG).

On request:

E- stainless steel (SS)

L - powder coating in a full range of colours (PC).

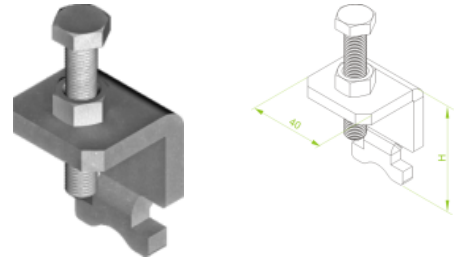

Versions:

| Symbol | Sheet thickness [mm] | Catalogue number | Quantity in box | Height H [mm] | Weight 1 pc. | Maximum load Fmax[kN] |
|--------|----------------------|------------------|-----------------|---------------|--------------|-----------------------|
| UCM3 | 6 | 752406 | 30 | 50 | 0,19 | 2,00 |
| UCM4 | 8 | 752407 | 30 | 54 | 0,23 | 3,60 |