

WZD... Beam Bracket

Overview:

Application

Attaching cable trays, ladders, pipes and other components to steel constructions

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

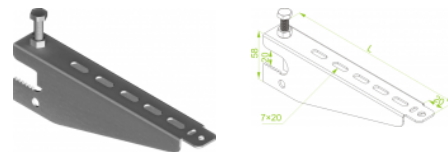

Versions:

Sheet thickness: **2,5 mm**

Symbol	Length L [m]	Catalogue number	Quantity in box	Weight 1 pc.	Maximum load F _{max} [kN]
WZD100	170	752420	50	0,30	0,50
WZD150	220	752430	30	0,39	0,30
WZD200	270	752440	30	0,49	0,20