

DMC...H55 Vertical Cable Ladder

Overview:

Application

Application
Routing cable runs of various types in the vertical plane.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel to 3m lengths (SS)

L- powder coating in a full range of colours (PC)

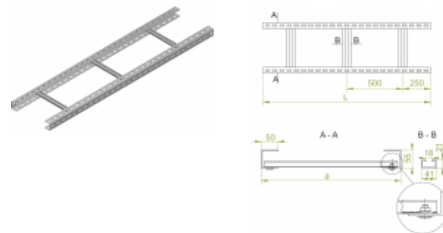

Versions:

Sheet thickness: **2,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]
DMC200H55/3	3000	200	404820	1	4,56
DMC200H55/6	6000	200	404920	1	4,56
DMC300H55/3	3000	300	404830	1	4,82
DMC300H55/6	6000	300	404930	1	4,82
DMC400H55/3	3000	400	404840	1	5,08
DMC400H55/6	6000	400	404940	1	5,08
DMC500H55/3	3000	500	404850	1	5,34
DMC500H55/6	6000	500	404950	1	5,34
DMC600H55/3	3000	600	404860	1	5,60
DMC600H55/6	6000	600	404960	1	5,60
DMC700H55/3	3000	700	404870	1	5,90
DMC700H55/6	6000	700	404970	1	5,90
DMC800H55/3	3000	800	404880	1	6,18
DMC800H55/6	6000	800	404980	1	6,18
DMC900H55/3	3000	900	404890	1	6,44
DMC900H55/6	6000	900	404990	1	6,44
DMC1000H55/3	3000	1000	404900	1	6,72
DMC1000H55/6	6000	1000	404991	1	6,72