

WFC/WFCO... Bracket

Overview:

Application

Suspending cable routes

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)


For wall-mount application use 2 pieces of Spacer PD 11 with 2 sets of PSRO M10×80 For the installation of:

- cable trays - use 1 set of Screw SGN M6×12

- cable ladders - use 2 pieces of Hold-Down Clip ZMO

with 2 sets of SGN M8×14

- wire mesh cable trays - use 2 pieces of Clamping Piece ZSO

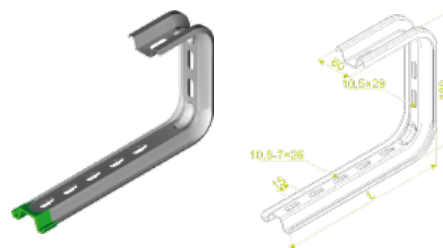

Versions:

Symbol	Length L [m]	Catalogue number	Quantity in box	Weight 1 pc.
WFC/WFCO100	170	720310	20	0,47
WFC/WFCO150	205	720315	20	0,53
WFC/WFCO200	270	720320	20	0,60
WFC/WFCO300	370	720330	20	0,73
WFC/WFCO400	470	720340	20	0,86