

## KKMPJ...H50 45° Horizontal Bend

### Overview:

**Application**

Diversions in cable routing.

**Material**


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E-** stainless steel (SS)

**L-** powder coating in a full range of colours (PC)

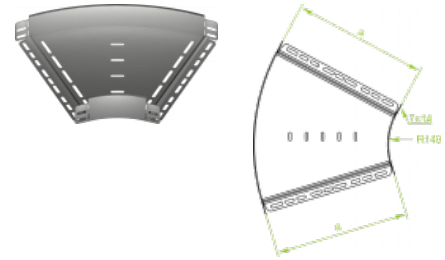


For installation use Screw Sets SGK M6×12 or SG M6×12.

### Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKMPJ50H50	50	151914	20	0,21
KKMPJ100H50	100	152014	20	0,31
KKMPJ150H50	150	152114	10	0,43
KKMPJ200H50	200	152214	10	0,56
KKMPJ300H50	300	152314	10	0,87
KKMPJ400H50	400	152414	10	1,24
KKMPJ500H50	500	152514	10	1,67
KKMPJ600H50	600	152614	10	2,16

### Connected products:

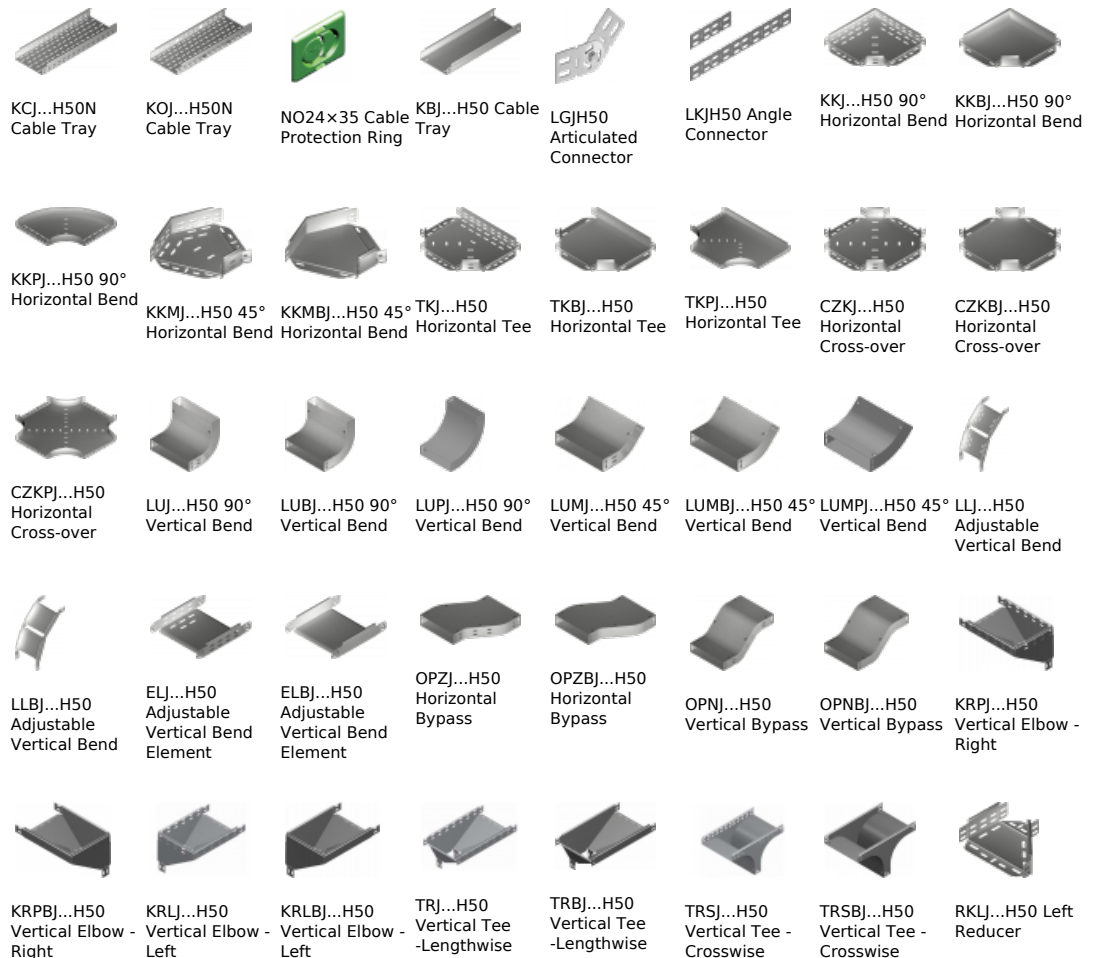

RKLBJ...H50  
ReducerRKPJ...H50  
ReducerRKPBJ...H50  
Right ReducerRKSJ...H50  
Straight  
ReducerRKSBJ...H50  
Straight  
ReducerLRJH50 Corner  
ConnectorLRBJH50 Corner  
ConnectorTKDJ...H50  
Add-on TeeLRPJH50 Corner  
Connector