

KKMPJ...H50 45° Horizontal Bend

Overview:

Application

Diversions in cable routing.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

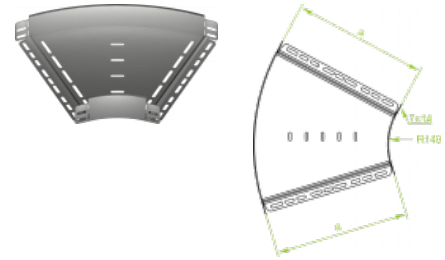


For installation use Screw Sets SGK M6×12 or SG M6×12.

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKMPJ50H50	50	151914	20	0,21
KKMPJ100H50	100	152014	20	0,31
KKMPJ150H50	150	152114	10	0,43
KKMPJ200H50	200	152214	10	0,56
KKMPJ300H50	300	152314	10	0,87
KKMPJ400H50	400	152414	10	1,24
KKMPJ500H50	500	152514	10	1,67
KKMPJ600H50	600	152614	10	2,16

Connected products:

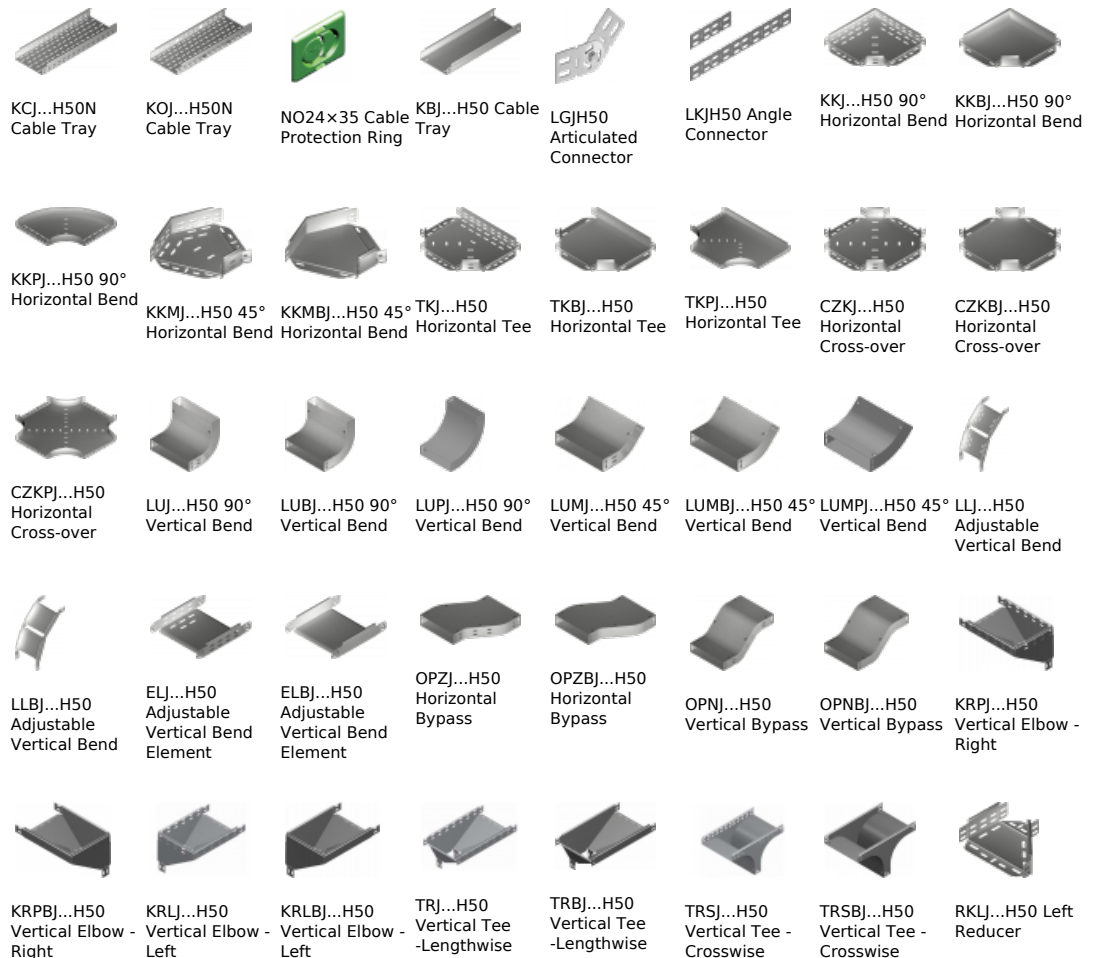



RKLBJ...H50
Reducer



RKPJ...H50
Reducer



RKPBJ...H50
Right Reducer



RKSJ...H50
Straight
Reducer



RKSBJ...H50
Straight
Reducer



LRJH50 Corner
Connector



LRBIH50 Corner
Connector



TKDJ...H50
Add-on Tee



LRPJH50 Corner
Connector