

KKJ...H60 90° Horizontal Bend

Overview:

Application

Diversions in cable routing.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

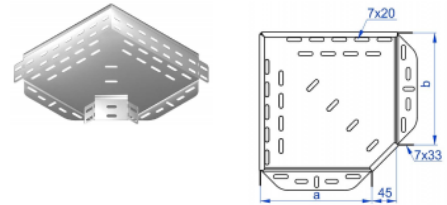


**For installation use Screw Sets SGK M6×12 or SG M6×12.
In case of special orders please specify dimensions a and b.**

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKJ50H60	50	162724	20	0,22
KKJ100H60	100	166210	20	0,41
KKJ150H60	150	166215	10	0,58
KKJ200H60	200	166220	10	0,79
KKJ300H60	300	166230	10	1,30
KKJ400H60	400	166240	10	2,20
KKJ500H60	500	166250	10	2,94
KKJ600H60	600	166260	10	3,92

Connected products:

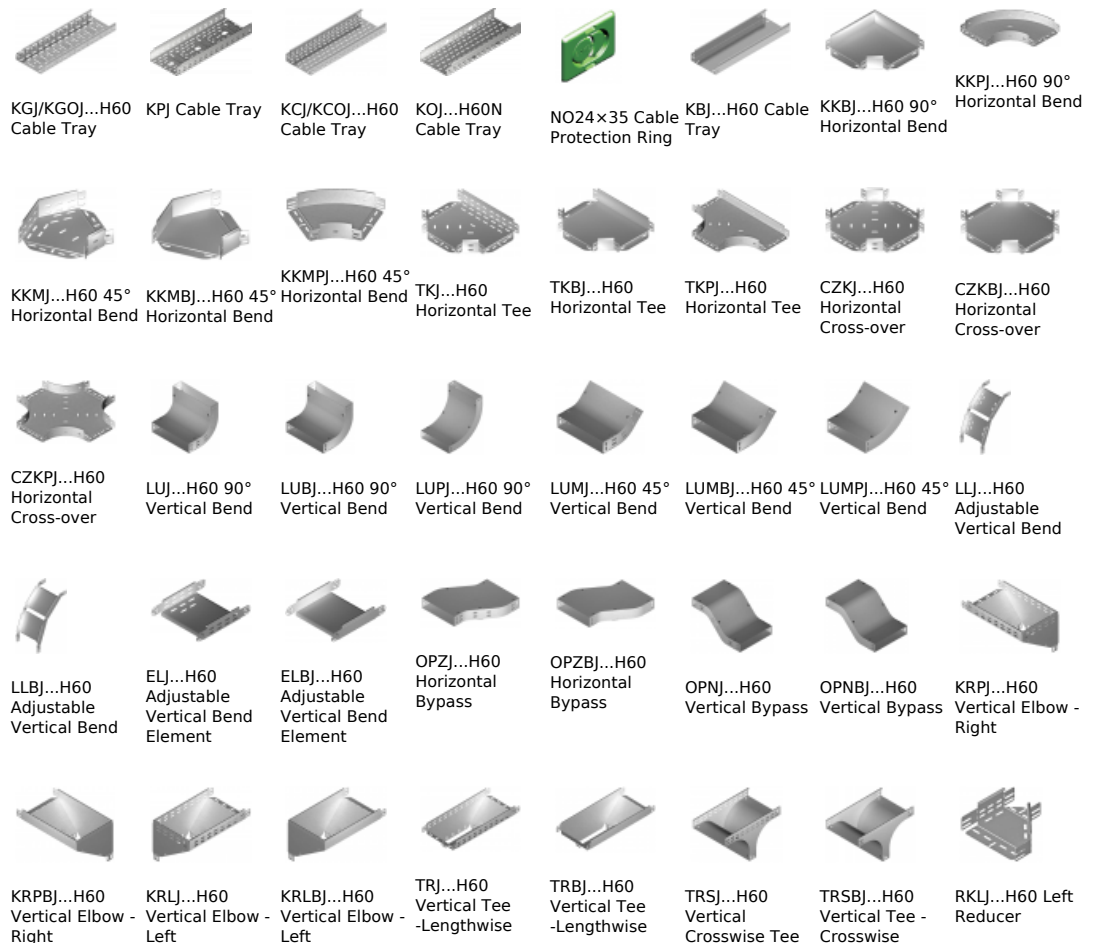




RKLBJ...H60 Left Reducer



RKPJ...H60 Right Reducer



RKPBJ...H60 Right Reducer



RKSJ...H60 Straight Reducer



RKSBJ...H60 Straight Reducer



LRJH60 Corner Connector



LRBH60 Corner Connector



TKDJ...H60 Add-on Tee



LRPJH60 Corner Connector