

## KKMBP...H60 45° Horizontal Bend

### Overview:

**Application**

Diversions in cable routing.

**Material**


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

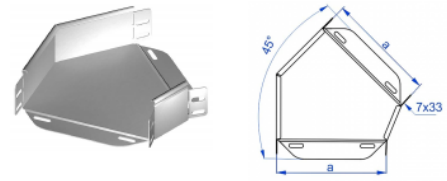


For installation use Screw Sets SGK M6×12 or SG M6×12.

### Versions:

Sheet thickness: 1,5 mm

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKMBP50H60	50	163624	20	0,24
KKMBP100H60	100	160104	20	0,43
KKMBP150H60	150	160204	10	0,62
KKMBP200H60	200	160304	10	0,88
KKMBP300H60	300	160504	10	1,53
KKMBP400H60	400	160604	10	2,31
KKMBP500H60	500	160704	10	3,10
KKMBP600H60	600	160804	10	4,12

### Connected products:

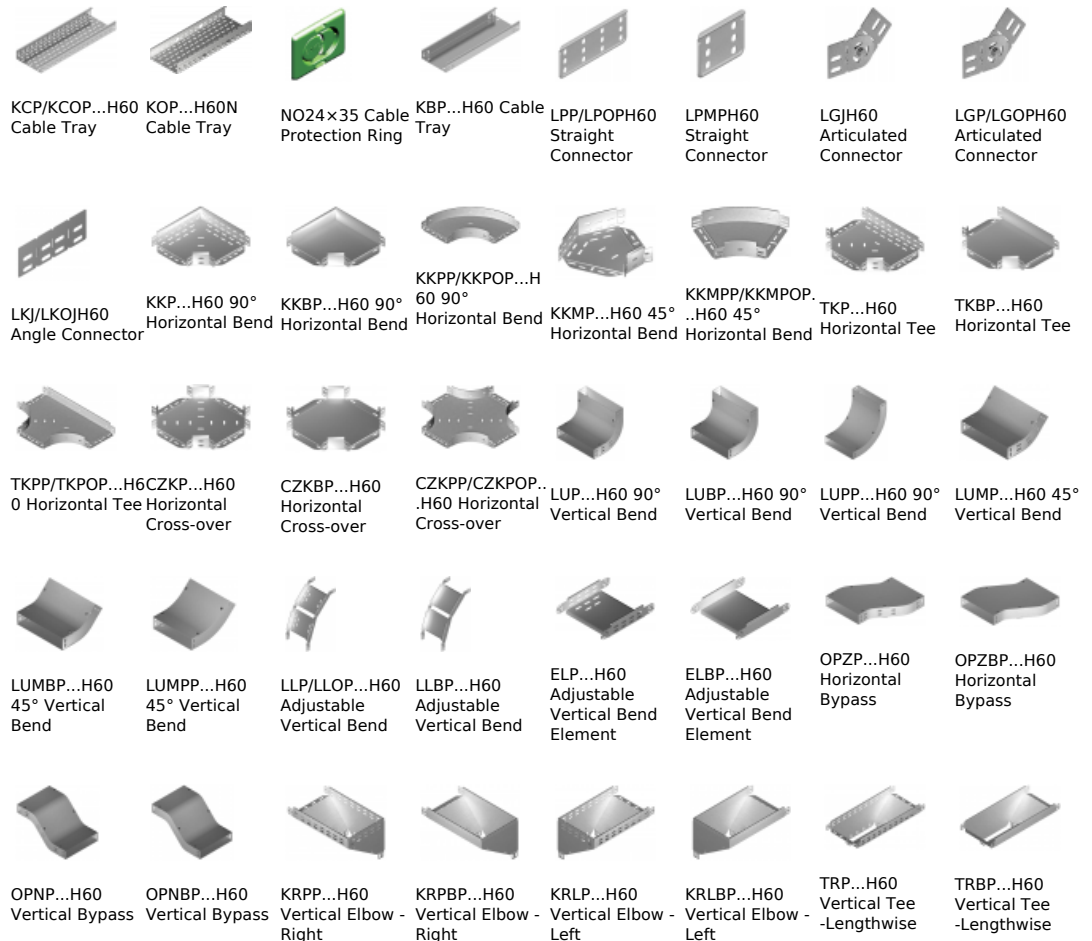



TRSP...H60  
Vertical Tee -  
Crosswise



TRSBP...H60  
Vertical Tee -  
Crosswise



RKL...H60 Left  
Reducer



RKLBP...H60 LeftRight  
Reducer



RKPP...H60  
LeftRight Reducer



RKPBP...H60  
Right Reducer



RKSP...H60  
Straight  
Reducer



RKSBP...H60  
Straight  
Reducer



TKDP...H60  
Add-on Tee



LRPPH60 Corner  
Connector