


LUBP...H60 90° Vertical Bend

Overview:

Application
Diversion in cable routing.

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E- stainless steel (SS)
L- powder coating in a full range of colours (PC)

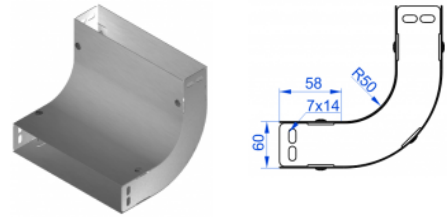


For installation use Screw Sets SGK M6x12 or SG M6x12 and Straight Connectors LPL or LPP. Quick and convenient installation by the use of dismantled parts. This innovative solution allows for fast and safe cable laying without the need of pulling









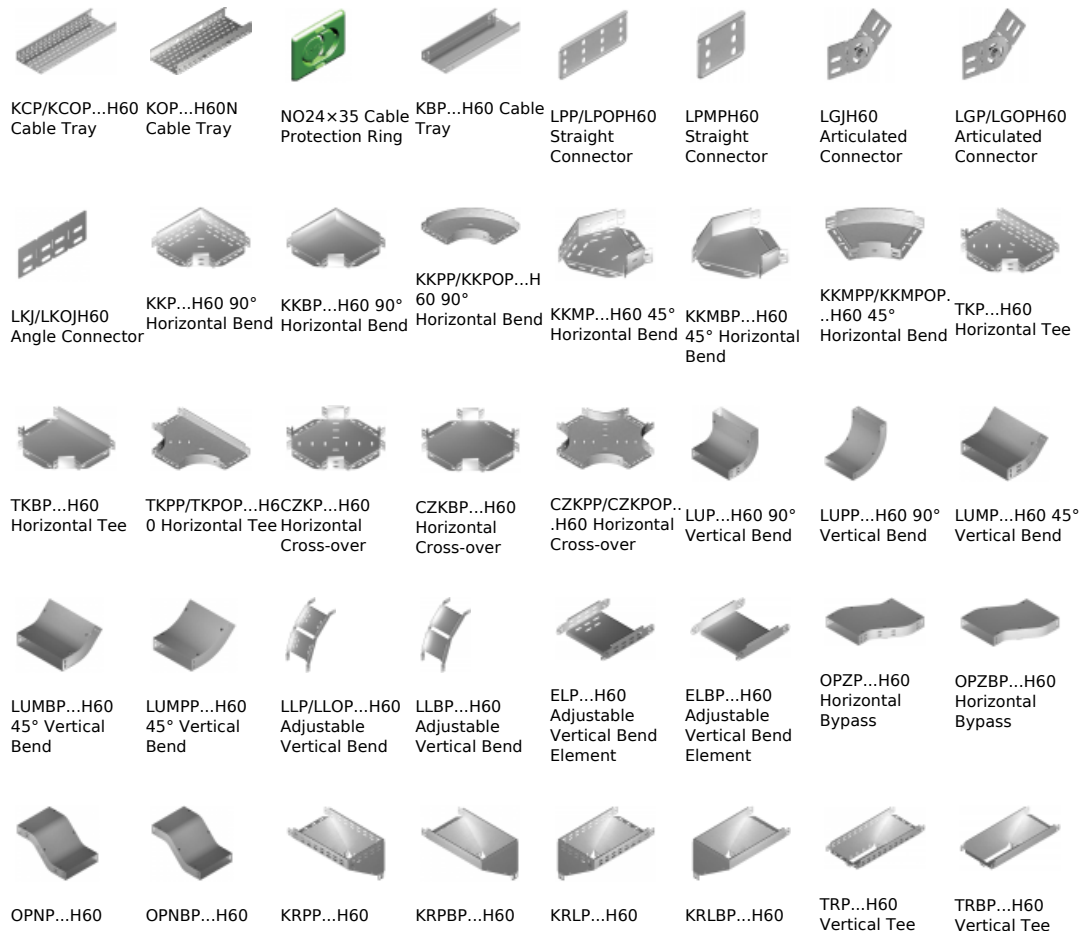

Versions:

Sheet thickness: 1,5 mm

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LUBP50H60	50	167424	2	0,66
LUBP100H60	100	161702	2	1,33
LUBP150H60	150	161802	2	1,75
LUBP200H60	200	161902	2	2,18
LUBP300H60	300	162102	2	3,01
LUBP400H60	400	162202	2	3,85
LUBP500H60	500	162302	2	4,65
LUBP600H60	600	162402	2	5,50

Connected products:



Vertical Bypass	Vertical Bypass	Vertical Elbow - Right	Vertical Elbow - Right	Vertical Elbow - Left	Vertical Elbow - Left	-Lengthwise	-Lengthwise
							
TRSP...H60 Vertical Tee - Crosswise	TRSBP...H60 Vertical Tee - Crosswise	RKL...H60 Left Reducer	RKLBP...H60 Left Reducer	RKPP...H60 LeftRight Reducer	RKPBP...H60 Right Reducer	RKSP...H60 Straight Reducer	RKSBP...H60 Straight Reducer
							
TKDP...H60 Add-on Tee	LRPPH60 Corner Connector						