

## LUMBJ...H60 45° Vertical Bend

### Overview:

**Application**

Diversions in cable routing.

**Material**


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**

**F-** steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

**E-** stainless steel (SS)

**L-** powder coating in a full range of colours (PC)

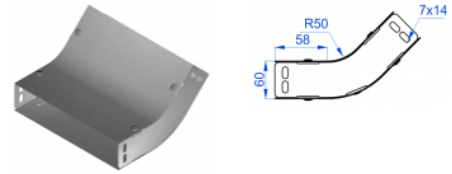

**For installation use Screw Sets SGK M6×12 or SG M6×12 and Straight Connectors LPL or LPP. Quick and convenient installation by the use of dismantled parts. This innovative solution allows for fast and safe cable laying without the need of pulling**

### Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LUMBJ50H60	50	167924	2	0,41
LUMBJ100H60	100	161703	2	0,61
LUMBJ150H60	150	161803	2	0,81
LUMBJ200H60	200	161903	2	1,01
LUMBJ300H60	300	162103	2	1,40
LUMBJ400H60	400	162203	2	1,79
LUMBJ500H60	500	162303	2	2,17
LUMBJ600H60	600	162403	2	2,56

### Connected products:

