

LLBJ...H60 Adjustable Vertical Bend

Overview:

Application

Diversions in cable routing. Full-range angle adjustment with a lock.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

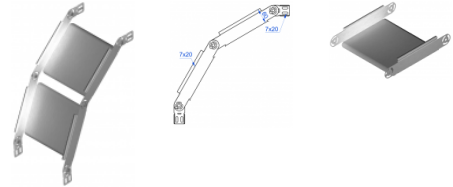

For installation use Screw Sets SGK M6×12 or SG M6×12.

Adjustable Vertical Bend is delivered fully assembled

together with:

2 Adjustable Vertical Bend Elements

4 pairs of Angle Connectors


6 sets of screws

Versions:

Sheet thickness: **1,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LLBJ50H60	50	168724	2	0,70
LLBJ100H60	100	162501	2	1,32
LLBJ150H60	150	162601	2	1,50
LLBJ200H60	200	162701	2	1,60
LLBJ300H60	300	162901	2	1,98
LLBJ400H60	400	163001	2	2,32
LLBJ500H60	500	163101	2	2,64
LLBJ600H60	600	163201	2	2,98

Connected products:

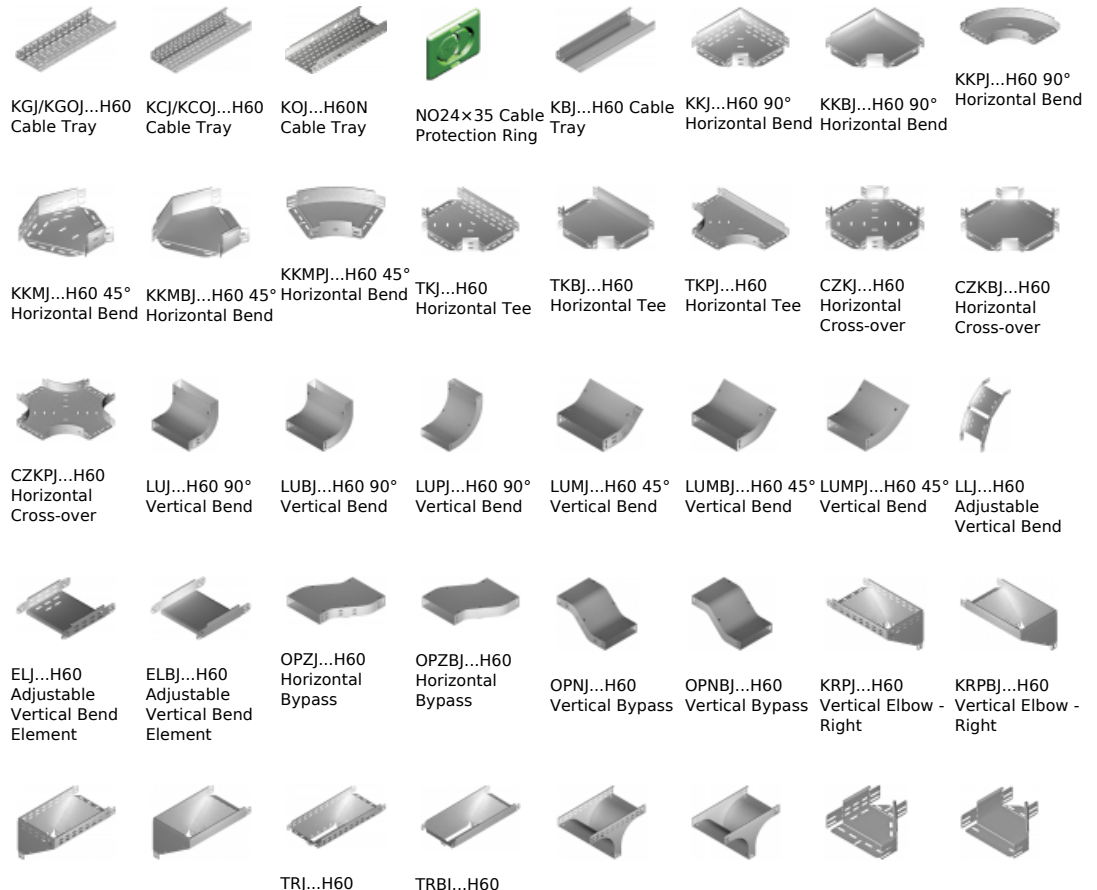

KRLJ...H60 Vertical Elbow - Left	KRLBJ...H60 Vertical Elbow - Left	Vertical Tee -Lengthwise	Vertical Tee -Lengthwise	TRSJ...H60 Vertical Crosswise Tee	TRSBJ...H60 Vertical Tee - Crosswise	RKLJ...H60 Left Reducer	RKLBJ...H60 Left Reducer
							
RKPJ...H60 Right Reducer	RKPBJ...H60 Right Reducer	RKSJ...H60 Straight Reducer	RKSBJ...H60 Straight Reducer	LRJH60 Corner Connector	LRBJH60 Corner Connector	TKDJ...H60 Add-on Tee	LRPJH60 Corner Connector