

LPLH60 Straight Connector

Overview:

Application

Connecting cable routes.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

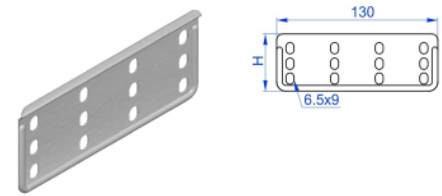

Use 8 Screw Sets SGK M6×10 or SG M6×10 to install
Important! Apply Straight Connectors LPL and LPP for
sturdy and firm tray joint.

The connectors are used for joining cut-to-length Cable
Trays KF...

For the assembly use at least 4 Screw Sets SGK M6×12 or
SGM6×12

Connected products:



KGL/KGOL...H60
Cable Tray



KPL Cable Tray



KCL/KCOL...H60
Cable Tray



NO24×35 Cable
Protection Ring



LZLH60 Snap-In
Connector



KBL...H60 Cable
Tray



LPMLH60 Straight
Connector