

LPDWOPE 90° Vertical Bend - Internal

Overview:

Application

Diversion in cable routing

Material

Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:


E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

For the installation with cable ladders use 2 pairs of LDOCH60N or LDOCH60E with 16 sets of Screw SGN M8×14 or SGN M8×14 E

FEATURES & BENEFITS:

- eye-pleasing appearance
- high mechanical properties
- even distribution of cables

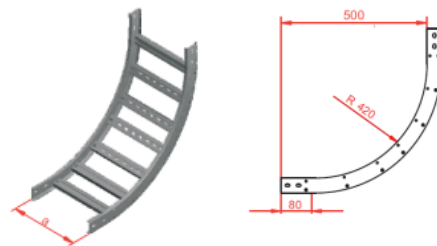

Versions:

Sheet thickness: 1,5 mm

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
LPDWOP100H60 E	100	865911	1	1,67
LPDWOP200H60 E	200	865921	1	2,03
LPDWOP300H60 E	300	865931	1	2,43
LPDWOP400H60 E	400	865941	1	2,79