

KGJ/KGOJ...H60 Cable Tray

Overview:

Application
Cable routing

Material
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:
L- powder coating in a full range of colours (PC)

Important! Possibility of joining cable tray sections together through sliding one into another and connector-free assembly. To install cable tray use Screw Sets SGK M6x12 or SG M6x12.














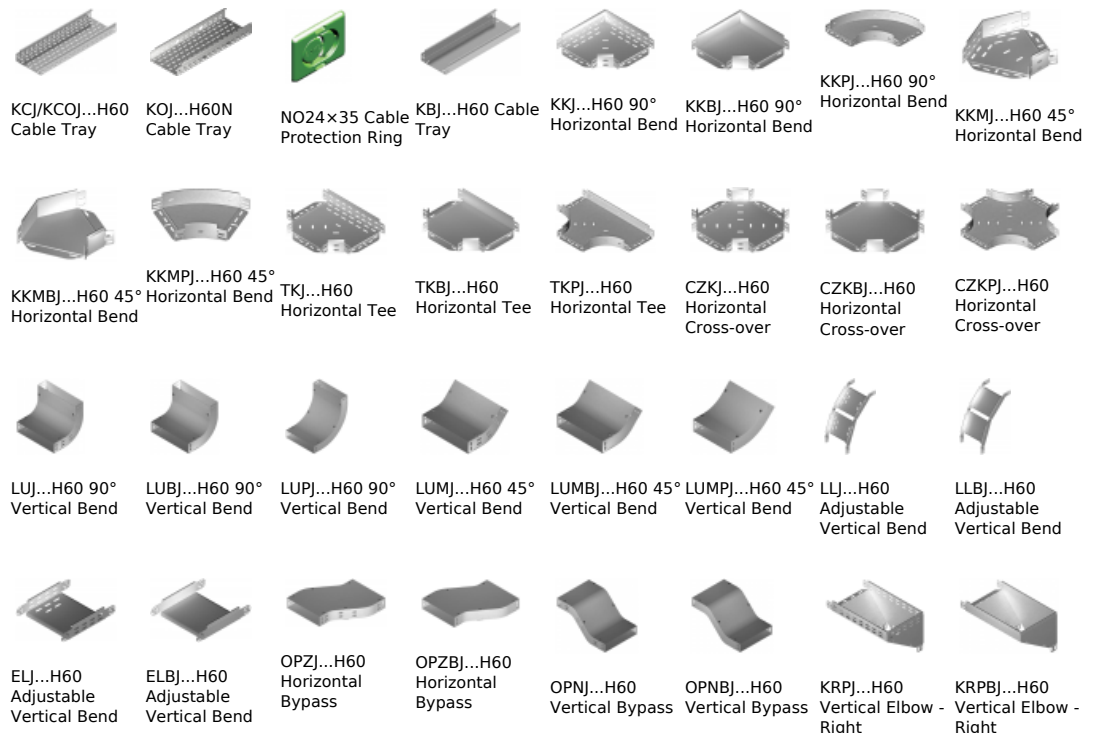





Versions:

Sheet thickness: **1,0 mm**

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]	Effective section
KGJ/KCJ50H60/3	3000	50	160624	6	1,33	2900
KGJ/KCJ50H60/6	6000	50	169460	6	1,33	2900
KGJ/KGOJ100H60/3	3000	100	160816	6	1,63	5800
KGJ100H60/6	6000	100	160817	6	1,63	5800
KGJ/KGOJ150H60/3	3000	150	160916	6	1,98	8800
KGJ150H60/6	6000	150	160917	6	1,98	8800
KGJ/KGOJ200H60/3	3000	200	161016	6	2,28	11800
KGJ200H60/6	6000	200	161017	6	2,28	11800
KGJ/KGOJ300H60/3	3000	300	161116	4	2,96	17800
KGJ300H60/6	6000	300	161117	4	2,96	17800
KGJ/KGOJ400H60/3	3000	400	161216	4	3,65	23800
KGJ400H60/6	6000	400	161217	4	3,65	23800
KGJ500H60/3	3000	500	161316	2	4,32	29800
KGJ500H60/6	6000	500	161317	2	4,32	29800
KGJ600H60/3	3000	600	161416	2	4,99	35800
KGJ600H60/6	6000	600	161417	2	4,99	35800

Connected products:



Element	Element						
							
KRLJ...H60 Vertical Elbow - Left	KRLBJ...H60 Vertical Elbow - Left	TRJ...H60 Vertical Tee -Lengthwise	TRBJ...H60 Vertical Tee -Lengthwise	TRSJ...H60 Vertical Crosswise Tee	TRSBJ...H60 Vertical Tee - Crosswise	RKLJ...H60 Left Reducer	RKLBJ...H60 Left Reducer
							
RKPJ...H60 Right Reducer	RKPBJ...H60 Right Reducer	RKSJ...H60 Straight Reducer	RKSBJ...H60 Straight Reducer	LRJH60 Corner Connector	LRBJH60 Corner Connector	TKDJ...H60 Add-on Tee	LRPJH60 Corner Connector