

## KMPC...H50 Cable Tray

### Overview:

#### APPLICATIONS

Connecting cable routes.

#### MATERIAL


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG).

Available finishes:

F- steel, hot-dip galv. to

PN-EN ISO 1461:2011 (HDG)

E - stainless steel (SS), grade 1.4301 (AISI304)

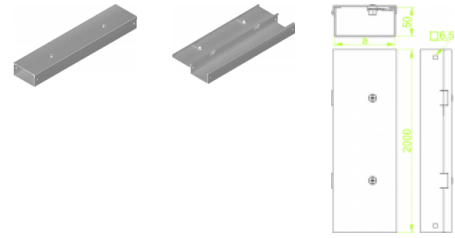

#### Cable trays together with covers in a set

Sheet thickness: **2,0 mm**

### Versions:

Symbol	Length L [m]	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]
KMPC200H50/2	2000	200	810120	2	7,20
KMPC300H50/2	2000	300	810130	2	12,20
KMPC400H50/2	2000	400	810140	2	15,40
KMPC500H50/2	2000	500	810150	2	18,80
KMPC600H50/2	2000	600	810160	2	22,00