


KPKMP...H50 90° Horizontal Bend

Overview:

APPLICATIONS
Diversion in cable routing

MATERIAL
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG).
Available finishes:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E - stainless steel (SS), grade 1.4301 (AISI304)

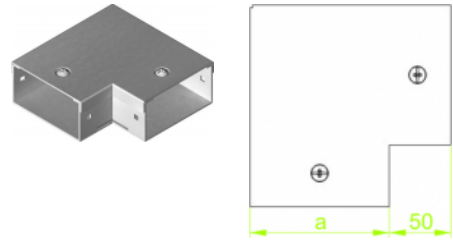

For installation use Screw Sets SGK6x14 and Straight Connectors LKM...

Versions:

Sheet thickness: **1,5 mm**

| Symbol | Width a [mm] | Catalogue number | Quantity in box | Weight [1m] |
|--------------------|--------------|------------------|-----------------|-------------|
| KPKMP50H50 | 50 | 810605 | 2 | 0,00 |
| KPKMP100H50 | 100 | 810610 | 2 | 0,00 |