


## KPKMP...H50 90° Horizontal Bend

### Overview:

**APPLICATIONS**  
Diversions in cable routing

**MATERIAL**  
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG).  
Available finishes:  
F- steel, hot-dip galv. to  
PN-EN ISO 1461:2011 (HDG)  
E - stainless steel (SS), grade 1.4301 (AISI304)

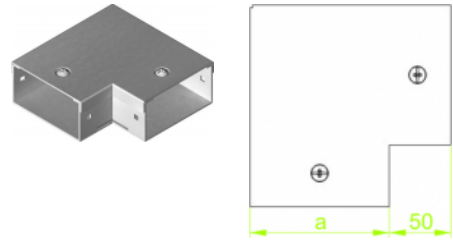

**For installation use Screw Sets SGK6x14 and Straight Connectors LKM...**

### Versions:

Sheet thickness: **1,5 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]
<b>KPKMP50H50</b>	<b>50</b>	<b>810605</b>	<b>2</b>	<b>0,00</b>
<b>KPKMP100H50</b>	<b>100</b>	<b>810610</b>	<b>2</b>	<b>0,00</b>