


## KKMMP...H50 45° Horizontal Bend

### Overview:

**APPLICATIONS**  
Diversions in cable routing

**MATERIAL**  
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG).  
Available finishes:  
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)  
E - stainless steel (SS), grade 1.4301 (AISI304)

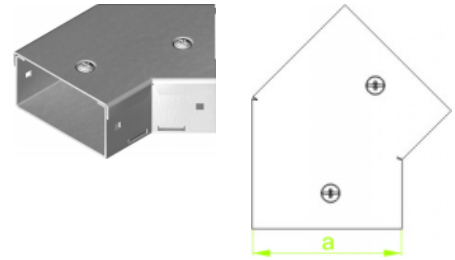

**For installation use Screw Sets SGKM6×14 and Straight Connectors LKM...**

### Versions:

Sheet thickness: **1,5 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]
<b>KKMMP50H50</b>	<b>50</b>	<b>810805</b>	<b>2</b>	<b>0,00</b>
<b>KKMMP100H50</b>	<b>100</b>	<b>810810</b>	<b>2</b>	<b>0,00</b>