


## LPKMMC...H50 45° Vertical Bend

### Overview:

**APPLICATIONS**  
Diversions in cable routing

**MATERIAL**  
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG).  
Available finishes:  
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)  
E - stainless steel (SS), grade 1.4301 (AISI304)

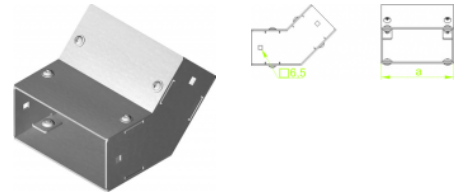

**For installation use Screw Sets SGKM6x14 and Straight Connectors LKM...**

### Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]
LPKMMC200H50	200	812620	2	0,00
LPKMMC300H50	300	812630	2	0,00
LPKMMC400H50	400	812640	2	0,00
LPKMMC500H50	500	812650	2	0,00
LPKMMC600H50	600	812660	2	0,00