

KKMBJ...H80 45° Horizontal Bend

Overview:

Application

Diversions in cable routing.

Material


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

Available to order:

F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)

E- stainless steel (SS)

L- powder coating in a full range of colours (PC)

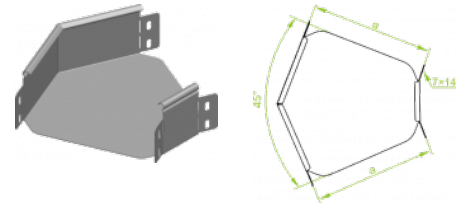


For installation use Screw Sets SGK M6×12 or SG M6×12.

Versions:

Sheet thickness: **1,0 mm**

| Symbol | Width a [mm] | Catalogue number | Quantity in box | Weight 1 pc. |
|-------------|--------------|------------------|-----------------|--------------|
| KKMBJ100H80 | 100 | 186310 | 10 | 0,34 |
| KKMBJ150H80 | 150 | 186315 | 10 | 0,43 |
| KKMBJ200H80 | 200 | 186320 | 10 | 0,63 |
| KKMBJ300H80 | 300 | 186330 | 4 | 1,12 |
| KKMBJ400H80 | 400 | 186340 | 4 | 1,61 |
| KKMBJ500H80 | 500 | 186350 | 2 | 2,14 |
| KKMBJ600H80 | 600 | 186360 | 2 | 2,84 |

Connected products:

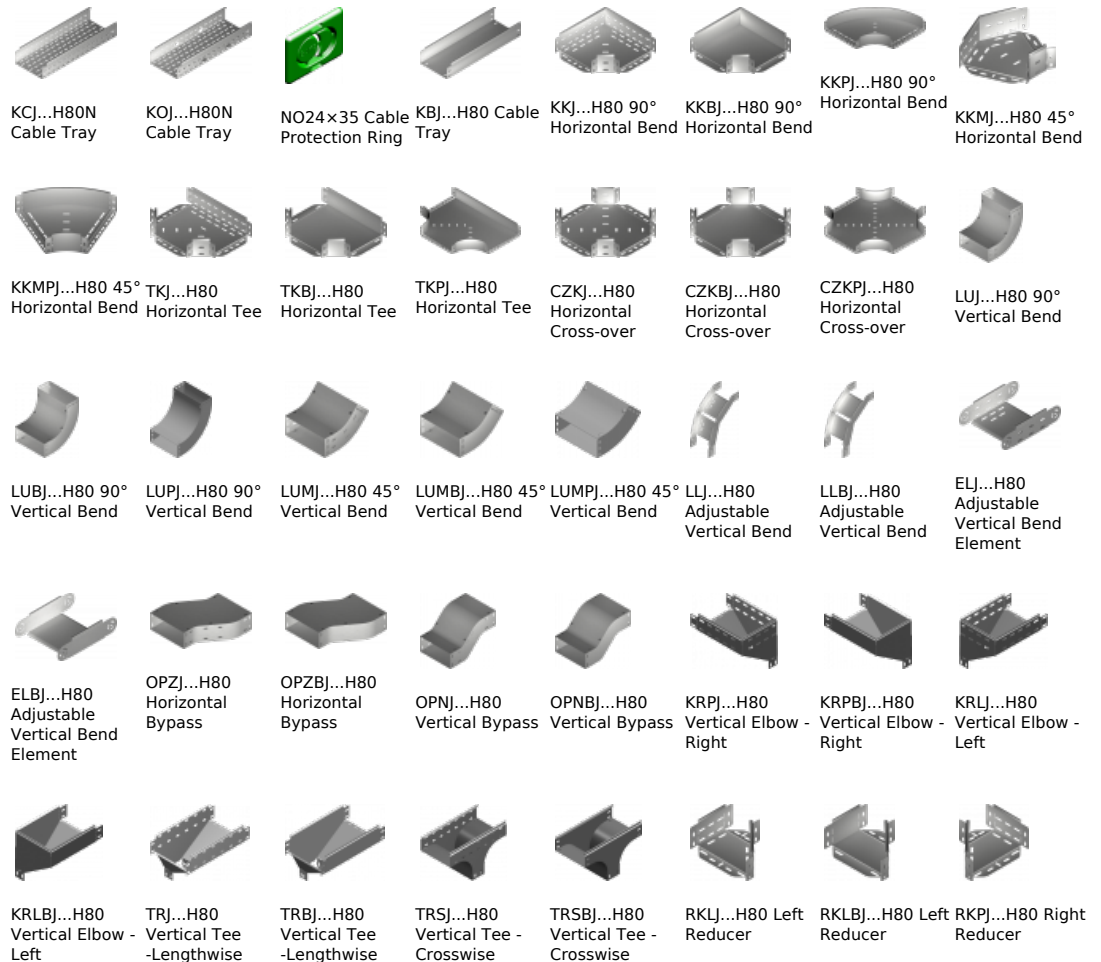

RKPBJ...H80
Right ReducerRKSJ...H80
Straight
ReducerRKSBJ...H80
Straight
ReducerLRJH80 Corner
ConnectorLRBJH80 Corner
ConnectorTKDJ...H80
Add-on TeeLRPJH80 Corner
Connector