


KPKMC...H100 90° Horizontal Bend

Overview:

APPLICATIONS
Diversion in cable routing

MATERIAL
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG).
Available finishes:
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)
E - stainless steel (SS), grade 1.4301 (AISI304)

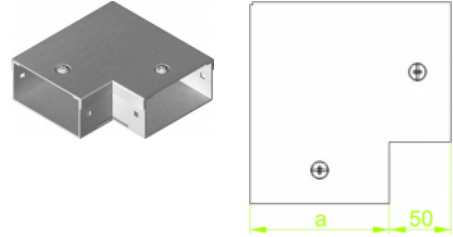

For installation use Screw Sets SGKM6x14 and Straight Connectors LKM...

Versions:

Sheet thickness: **2,0 mm**

| Symbol | Width a [mm] | Catalogue number | Quantity in box | Weight [1m] |
|--------------|--------------|------------------|-----------------|-------------|
| KPKMC200H100 | 200 | 814020 | 2 | 0,00 |
| KPKMC300H100 | 300 | 814030 | 2 | 0,00 |
| KPKMC400H100 | 400 | 814040 | 2 | 0,00 |
| KPKMC500H100 | 500 | 814050 | 2 | 0,00 |
| KPKMC600H100 | 600 | 814060 | 2 | 0,00 |