


## KKMMC...H100 45° Horizontal Bend

### Overview:

**APPLICATIONS**  
Diversions in cable routing

**MATERIAL**  
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG).  
Available finishes:  
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)  
E - stainless steel (SS), grade 1.4301 (AISI304)

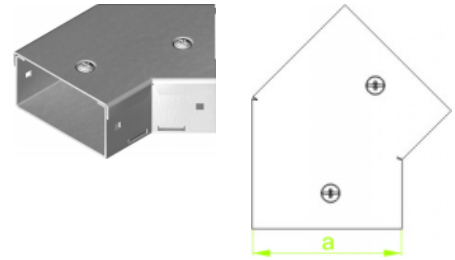

**For installation use Screw Sets SGK6x14 and Straight Connectors LKM...**

### Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]
KKMMC200H100	200	814220	2	0,00
KKMMC300H100	300	814230	2	0,00
KKMMC400H100	400	814240	2	0,00
KKMMC500H100	500	814250	2	0,00
KKMMC600H100	600	814260	2	0,00