


## KKMBP...H80 45° Horizontal Bend

### Overview:

**Application**  
Diversion in cable routing.

**Material**  
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG)

**Available to order:**  
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)  
E- stainless steel (SS)  
L- powder coating in a full range of colours (PC)

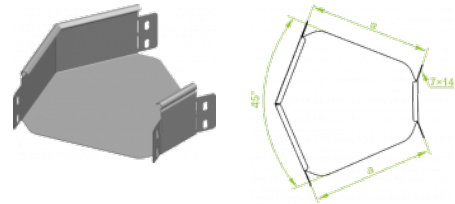


**For installation use Screw Sets SGK M6×12 or SG M6×12.**

### Versions:

Sheet thickness: **1,5 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight 1 pc.
KKMBP100H80	100	186410	10	0,48
KKMBP150H80	150	186415	10	0,66
KKMBP200H80	200	186420	10	0,94
KKMBP300H80	300	186430	4	1,61
KKMBP400H80	400	186440	4	2,41
KKMBP500H80	500	186450	2	3,19
KKMBP600H80	600	186460	2	4,26

### Connected products:

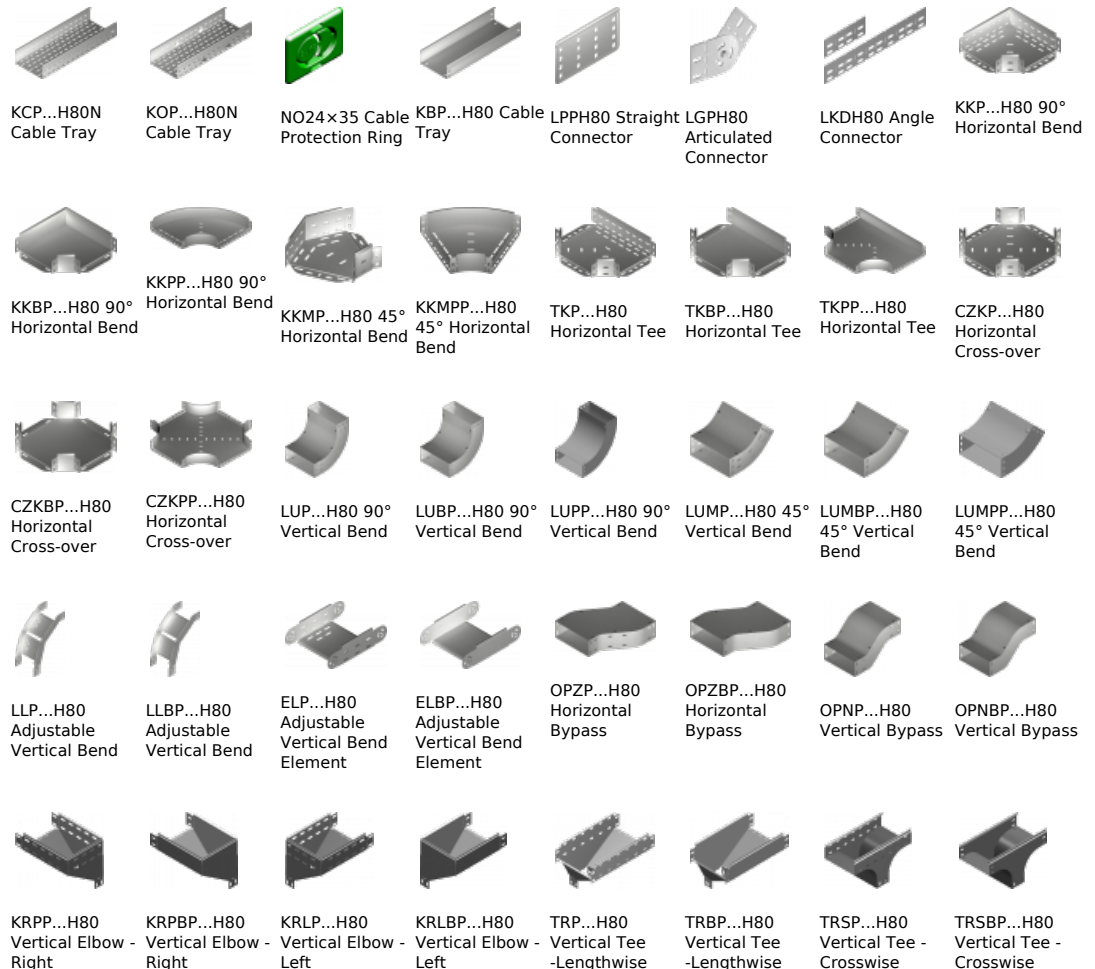

RKLP...H80 Left  
ReducerRKLBP...H80 Left  
ReducerRKPP...H80  
Right ReducerRKPBP...H80  
Right ReducerRKSP...H80  
Straight  
ReducerRKSBP...H80  
Straight  
ReducerTKDP...H80  
Add-on TeeLRPPH80 Corner  
Connector