

## OPNKMC...H100 Vertical Bypass

### Overview:

#### APPLICATIONS

Bypassing mechanical obstacles in cable routing

#### MATERIAL


Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG).

Available finishes:

F- steel, hot-dip galv. to

PN-EN ISO 1461:2011 (HDG)

E - stainless steel (SS), grade 1.4301 (AISI304)

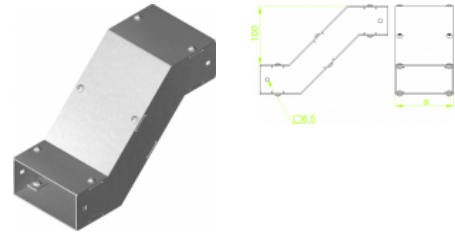

**For installation use Screw Sets SGKM6x14 and Straight Connectors LKM...**

### Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]
OPNKMC200H100	200	815520	2	0,00
OPNKMC300H100	300	815530	2	0,00
OPNKMC400H100	400	815540	2	0,00
OPNKMC500H100	500	815550	2	0,00
OPNKMC600H100	600	815560	2	0,00