


## KKMMC...H200 45° Horizontal Bend

### Overview:

**APPLICATIONS**  
Diversions in cable routing

**MATERIAL**  
Steel, strip-galv. acc. to the Sendzimir method to PN-EN 10346:2011 (SG).  
Available finishes:  
F- steel, hot-dip galv. to PN-EN ISO 1461:2011 (HDG)  
E - stainless steel (SS), grade 1.4301 (AISI304)

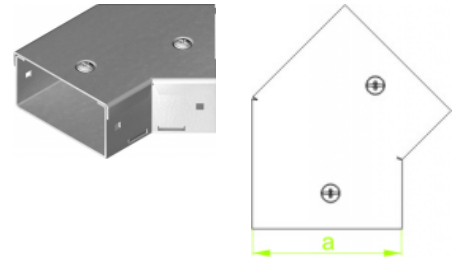

**For installation use Screw Sets SGK6x14 and Straight Connectors LKM...**

### Versions:

Sheet thickness: **2,0 mm**

Symbol	Width a [mm]	Catalogue number	Quantity in box	Weight [1m]
KKMMC200H200	200	817120	2	0,00
KKMMC300H200	300	817130	2	0,00
KKMMC400H200	400	817140	2	0,00
KKMMC500H200	500	817150	2	0,00
KKMMC600H200	600	817160	2	0,00